

UES foils




Flexy

PLOTTER CUT TRANSFER FILMS

More than 20 different color options are available in Metallic, Semi Matt, Matt, Hologram & Broken Glass types.

Plotter cut transfer films are used to transfer plotter cutting machine prepared patterns onto fabric.

Their high features and resistance to more than 20 washing cycles, saves mold costs in low-volume production.

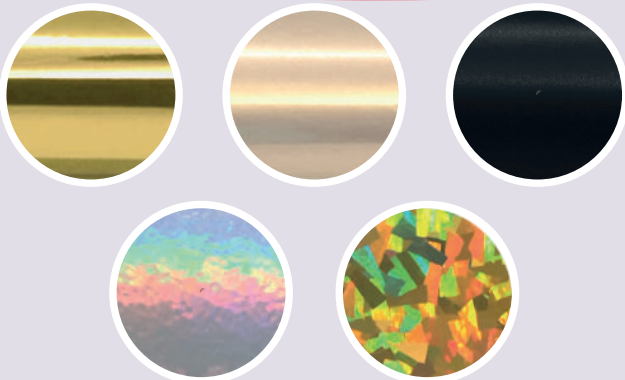

international@uesfoils.com

UES Foils B.V.

Parellaan 52, 2132 WS Hoofddorp - The NETHERLANDS

+31 23 785 29 93

uesfoils.com @ uesfoils

UES Makina Tekstil İnşaat ve Gıda San. Tic. Ltd. Şti.
Atatürk Mah. Kasırga Sok. No:6/2 Esenyurt - İstanbul - TÜRKİYE

+90 212 557 10 40

Application Parameters

- Cutting blade: 60°
- Cutting pressure: 130gf
- Cutting speed: 15-20cm/sec
- Transfer temperature: 160-170°C
- Transfer pressure: 4-5 bar
- Transfer time: 10-15sec

Available Quantities and Sizes

CORE	LENGTH	WIDTH
3" core	100 m	50 cm

All foil thicknesses are 110 microns
30 microns transferrable

Application Method

- Flexy film must be cut from reverse side
- Excess parts should be peeled of
- Ready to print motif should be placed onto base material
- Stamping parameter recommendations should be used
- Removing the carrier film should be done after cool down



Digital Catalogue



STANDARD
100



19.HTR.97674
Hohenstein HTTI

www.oeko-tex.com